


UNOMACH

THREE LOBE ROTARY BLOWER

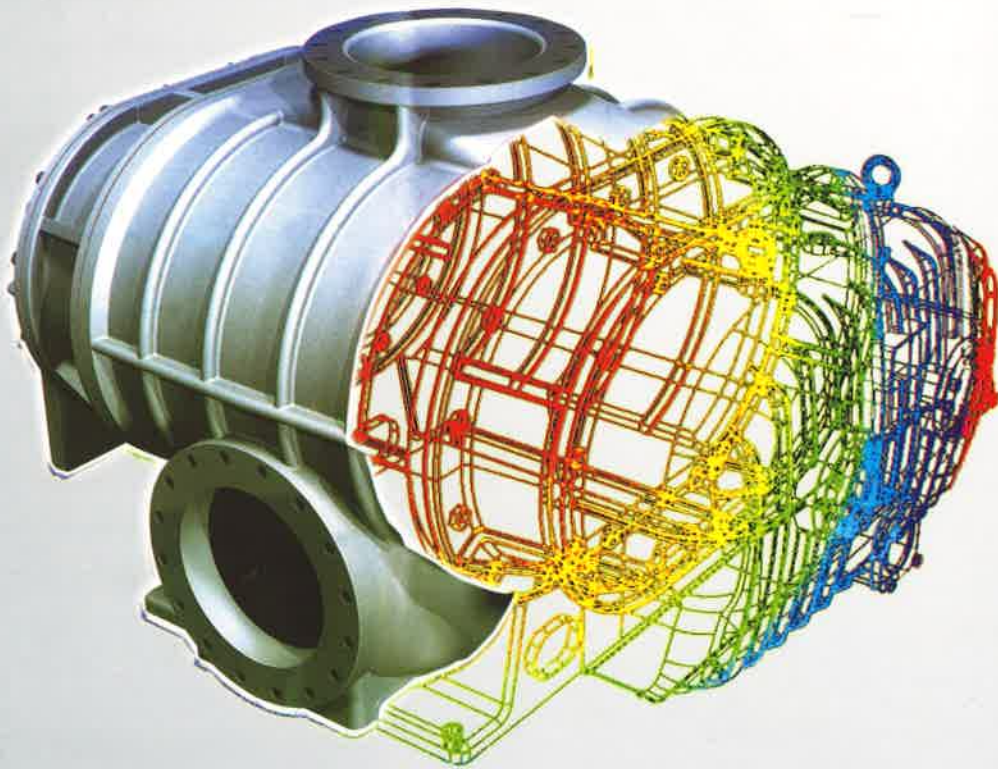

**BLOWER DATA BOOK
"ARC" SERIES**

" ARC " Series

" ARC " Three Lobe Positive Displacement Blower

UNOMACH has been recognized as one of the leading brands in the field of air blower. Our ARC SERIES have long been tested with highly satisfactory results in many applications ranging from wastewater treatment plant, oxygen supply to aquarium, spa pool, sand blasting, incinerator, press machinery, powder and granular material transport, and many other pneumatic conveying applications, as well as smoke extraction from clean room, vacuum packing, vacuum drying, vacuum car and vacuum casting.

Our ARC SERIES technology of three-lobe rotary blower has surpassed that of the competitors and resulted in less noise operation and longer life time.

In addition, we supply acoustic enclosure for the air blowers in order to meet the requirement of extremely sensitive noise area.

Moreover, we have air diffusers which give very fine bubbles easily dissolved into water, resulting in high oxygen transfer rate.

We have factories in many countries and we emphasize on the quality control. So our customers can be assured of the quality and have peace of mind when they use our products.

Advantages

* Three lobe rotor blower and vacuum pump:

An ideal air handler usable to satisfy a number of work conditions, the new series low noise units can be used to satisfy a wide range of user requirements. The specifications are as follows:

Blowers:

Piping size: 40 - 300 mm

Suction pressure: Atmospheric pressure

Discharge pressure: 1000 - 8000 mmAq.

Capacity: 0.38 - 190 m³/ min.

Vacuum pumps:

Piping size: 40 - 300 mm

Suction pressure: (-1000) - (-5000) mmAq.

Discharge pressure: Atmospheric pressure

Capacity: 0.38 - 190 m³/ min.

This catalogue details air capacities, noise characteristics and external dimensions of units - so pick the model that meets your needs.

* Low noise - less vibration

Due to the three lobe rotor, pulsations of air discharge from the blower have been greatly reduced. Noise and vibration have also been significantly eliminated.

Control of Blower Speed

When blower's discharge pressure remains constant, its air volume and horse power are proportional to blower speed. When you need to adjust air volume, it is recommended not to discharge extra air into the open air, but to reduce blower speed to reduce horse power. This will greatly contribute to a reduction in power consumption. Usually, a variable speed motor is used and its rpms are controlled in response to pressure or air volume signals. Maximum and minimum blower speed differ according to service conditions, so please consult us for the necessary information.




Principle

A pair of rotors turn in opposite directions inside the casing, maintaining a precision clearance between the inside wall of the casing and the two rotors. Air is taken into the blower as the lobe end of each rotor passes the suction port and transferred from the suction side to the discharge side.

It is then discharged, forced towards the high pressure side. Air at the suction side is caught in volume "A" surrounded by lobe ends (A), (B) and the casing in process as shown in illustrations (1) and (2) at right, and after steps (3) and (4), is discharged (step 5).

With three lobes, this process is repeated six times per one rotation and constant volume of air proportional to the number of revolutions are discharged.

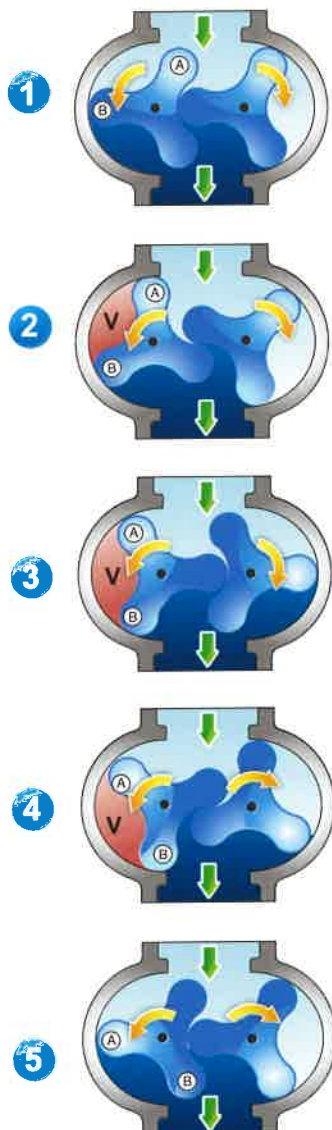

Advantages of the three lobe rotor

Compression takes place when the rotor's lobe end faces the discharge port and high pressure air at the discharge side flow back into the casing.

The main cause of blower noise lies in this pulsation of pressure that accompanies the back-flow compression.

In case of the three lobe rotor, the cycle of pulsation is $2/3$ that of the two lobe rotor. The pressure peak value also reduces. In addition, since the three lobe rotor is of specially designed construction

so as to minimize the range of pulsations, pulsations at the discharge port have been conspicuously reduced, compared with the two lobe rotor.

Consequently, the back-flow compression of blower is done smoothly and noise level greatly lowered. Since discharge air pulsations have been smoothed, changes in axial torque and bearing load, and vibration and noise of timing gear and bearing have been remarkably reduced.

Shaft Sealing

The "ARC" Blowers are available with many types of standard shaft sealing. The type of blower shaft sealing is selected according to the gas handled. When handling a special kind of gas, a mechanical seal is provided-either single or double mechanical seal can be used. Available types of shaft sealing and their general uses are as follows :


1. Standard types:

The standard type for blower mainly suitable for blower that handles air.

Seal position **A** Oil seal

Seal position **B** Labyrinth seal

Seal position **C** Labyrinth seal

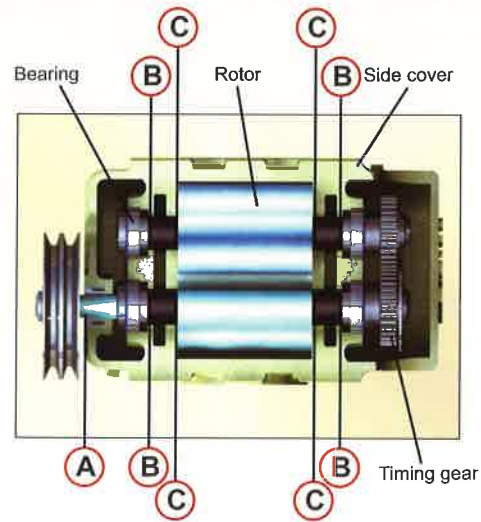

Detail of the standard shaft seal



Seal position A
(Oil seal)



Seal position B
(Labyrinth seal)



Seal position C
(Labyrinth seal)

2. One-mechanical seal "K" type:

Provided with one mechanical seal on the shaft.

Suitable for sealing the shaft when gases that should not be leaked into air are handled-N₂, H₂, Ar, CO, CO₂ and other non-solvent gases; and also coke oven gas, city gas, digested gas, etc.

This type is available with either of two systems of "Ka" and "Kb" at seal position "A" according to working pressure and the water content of those gas being handled.

Type "Ka"	Type "Kb"
Seal position A Single mechanical seal	Double mechanical seal
Seal position B Oil seal or Labyrinth seal	Oil seal or Labyrinth seal
Seal position C Labyrinth seal	Labyrinth seal

3. Four-mechanical seal "B" type:

Mechanical seals are provided at four points on the back of the bearing. Used for sealing the shaft when handling solvent gases. This type is available with either single mechanical seals or double mechanical seals according to the constituents of the gas being handled.

Type "Ba"	Type "Bb"
Seal position A Oil seal	Oil seal
Seal position B Single mechanical seal	Double mechanical seal
Seal position C Labyrinth seal	Labyrinth seal

4. Four-mechanical seal "I" type:

Mechanical seals are provided at four positions of the rotor shaft. Handled gas is completely separated from the bearing.

Type "Ia"	Type "Ib"
Seal position A Oil seal	Oil seal
Seal position B Labyrinth seal	Labyrinth seal
Seal position C Single mechanical seal	Double mechanical seal

Application

1. As an air blower:



















For pneumatic conveyors and the chemical industry for humidifying and aeration to water treatment and blending and aeration of powder or granular foods, cement, or vinyl.

2. As a gas blower:

For pressurized transportation or circulation of gases in chemical processes. Hydrogen, Nitrogen, Acetylene, Oxygen, Kerosene gas, Methane, Sulfurous acid gas, Stack flue gas, City gas, Carbonic acid gas, Hydrogen sulfide gas, and Hydrochloric acid gas.

3. As a vacuum pump:

Filtration equipment in the chemical industry, Pneumatic conveyors, Ship unloading.

<p>Purification tank</p>  <p>Used to agitate sediment and for purification at water treatment plants.</p>	<p>Furnace</p>  <p>The blower can help boost burn performance and promote exhaust gas removal.</p>	<p>Pipe cleaning</p>  <p>Used to remove dust and rust when replacing piping or conducting periodic inspections.</p>	<p>Bottle washer</p>  <p>Used to remove water droplets remaining inside bottles after washing.</p>
<p>Fertilizer production using manure fermentation</p>  <p>Used to hasten fermentation by feeding air.</p>	<p>Plating tank</p>  <p>To improve the quality of plating, air is fed into the tank to recirculate the electrolyte. The Roots blower is used as the air source.</p>	<p>Gas burner</p>  <p>High-pressure discharge air can be used to disperse the fuel.</p>	<p>Airbrush</p>  <p>High-pressure discharge air containing no oil is extremely well-received for airbrush applications.</p>
<p>Fishery pond enzyme supply</p>  <p>Used for underwater enzyme supply in comparatively shallow ponds.</p>	<p>Printing press paper feed</p>  <p>Operations are simplified by using discharge air to separate, align, and feed the paper.</p>	<p>Sandblasting</p>  <p>Used as the air source for sandblasting.</p>	<p>Spraying</p>  <p>Used to supply high-pressure discharge air containing no oil to the sprayer.</p>
<p>Stamping die</p>  <p>Used to remove the stamped workpiece from the die.</p>	<p>Therapeutic bath</p>  <p>Widely used in hospitals and hotels for healthy bath aeration.</p>	<p>Backwash</p>  <p>Used as a backwash for filters.</p>	<p>Ballast pump</p>  <p>Used for liquid chemical ship lowering and other types of ballast pumping.</p>
<p>Dessication line</p>  <p>Used on small-scale dessication lines.</p>	<p>Grain transfer</p>  <p>Used for pneumatic transport of wheat or other grain separated by a rotary valve.</p>	<p>Particulates transport</p>  <p>Used for air transfer of pellet materials such as vinyl chloride or polyethylene [can also be used for suction type applications].</p>	<p>Circulation</p>  <p>Used for the recirculation of nitrogen, carbon dioxide, city gas, LP gas, etc.</p>

Noise Data

Noise emissions from the rotary blower fluctuate depending upon blower size, discharge pressure and number of revolutions. The blower noise level is measured according to JIS B 8346 "Noise Level Measuring Method for Blower and Compressors. Noise is measured at 4-6 spots which are 1m apart from the blower depending on its size. Based on the measurement, a typical noise value is calculated according to the following formula.





$$\bar{L} = 10 \log_{10} (10^{\frac{L_1}{10}} + 10^{\frac{L_2}{10}} + \dots + 10^{\frac{L_n}{10}}) - 10 \log_{10} n$$

Where \bar{L} : typical noise level [dB(A)]








$L_1, L_2 \dots L_n$: measured value [dB(A)]

n : number of measured values

Typical noise values shown below are estimated values that will be obtained when measured values that will be obtained when measured according to the JIS mode above.

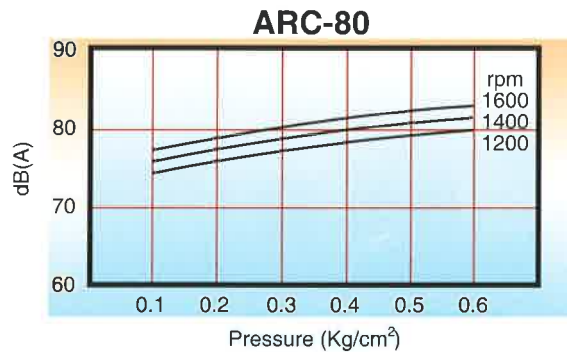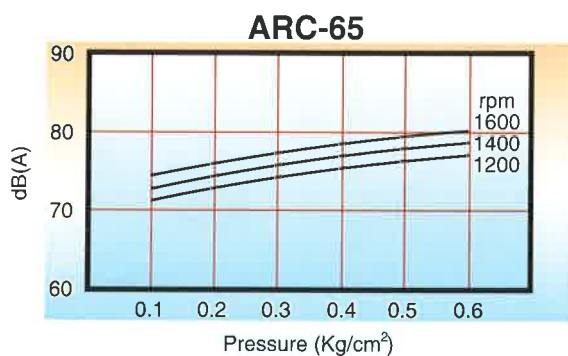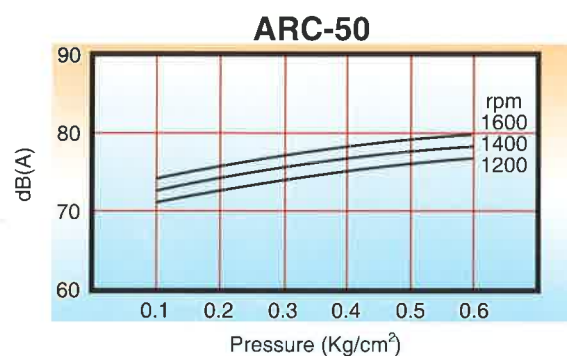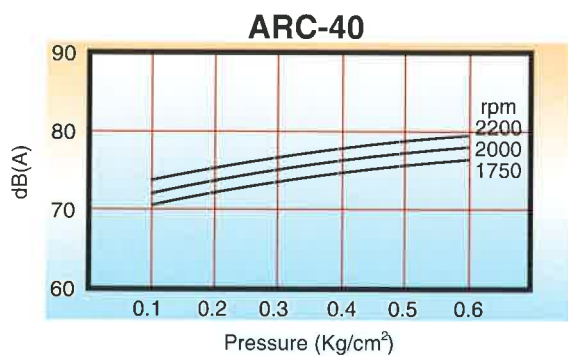

Noise Data

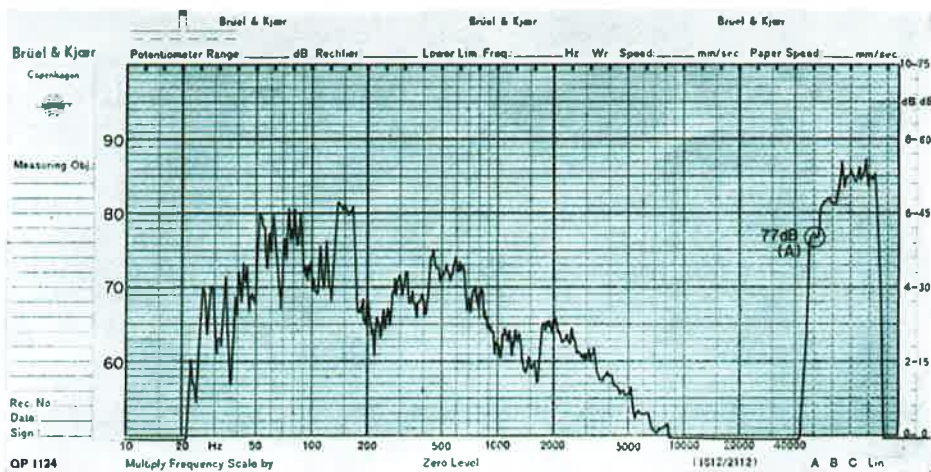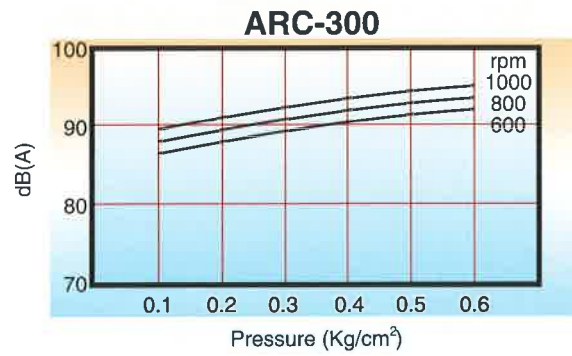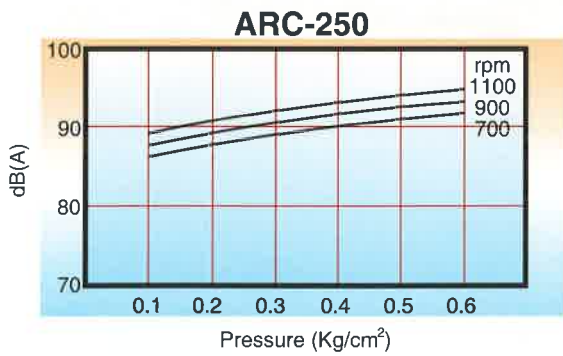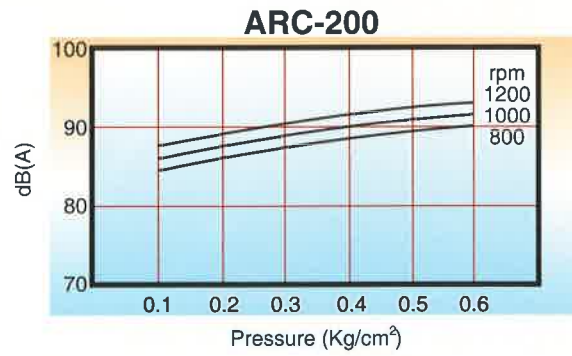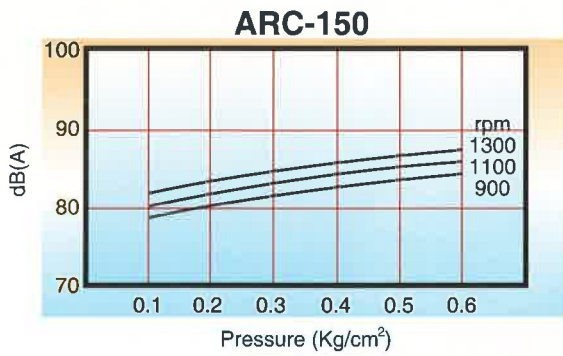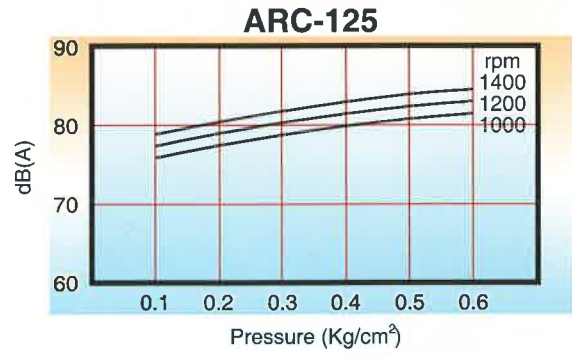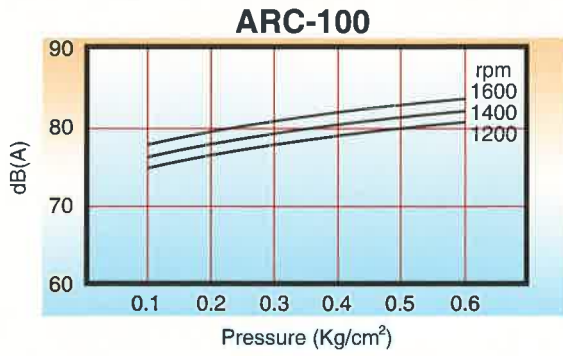

Noise Spectrum

Noise from each size blower has a spectrum distribution (1/3 octave band), as shown in the illustration at the right.

Construction

* Casing


Since piece body of cast iron, consisting of the upper suction and the lower horizontal discharge sections, ensures sufficient strength and durability. Internal inspections are facilitated by large suction port in the casing.

* Rotor

The three lobe rotor is built of cast iron of good quality subjected to high precision machining. The inside clearances are precision matched and optimum efficiency is guaranteed. In addition, as it is perfectly balanced by means of balancing machine, noise and vibration are minimized.

* Timing gear

Special considerations have been given to the timing gear, since it is as important part of blower as the rotor. Made of Nickel Chrome Molybdenum steel, carburized, quenched and ground, it is excellent in durability.

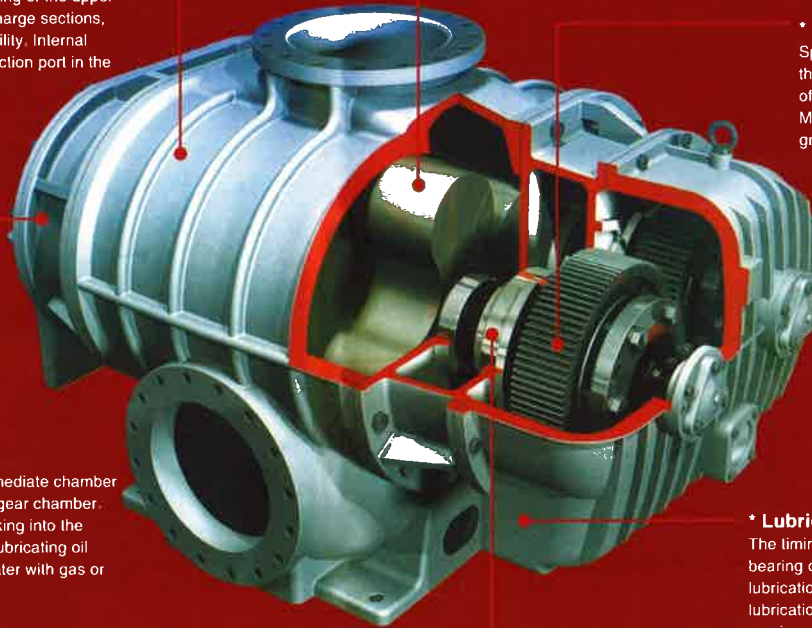

* Side cover

The side cover functions as an intermediate chamber between the casing and the bearing/gear chamber. This prevents lubricating oil from leaking into the casing, while eliminating the fear of lubricating oil deteriorating due to contaminated water with gas or air handled.

* Bearing

The bearings are high precision ball bearings with a load capacity suited for working conditions. Stable performance and long service life are guaranteed.

* Lubrication

The timing gear, the bearing on the gear side and the bearing on the pulley side are subjected to splash lubrication by oil bath. In order to ensure ideal lubrication, oil is used throughout. Depending upon service conditions, a cooling pipe can be attached to each of the oil basins on the pulley and the gear sides, in order to prevent oil temperature from rising, or prevent oil itself from deteriorating.

Spare Parts:

Size	Model	Dimensions
Oil Seal	ARC-40	18x30x7
	ARC-50, ARC-65	32x58x8
	ARC-80, ARC-100	42x65x10
	ARC-125, ARC-150	55x78x12
	ARC-200, ARC-250	72x95x13
	ARC-300	95x120x13
Bearings	ARC-40	6204Z
	ARC-50, ARC-65	6207Z
	ARC-80, ARC-100	6309Z
	ARC-125, ARC-150	6312Z
	ARC-200, ARC-250	Pulley side: 22215, Gear side: NU 2215
	ARC-300	Pulley side: 22220, Gear side: NU 2220




ARC Series blower with special sound enclosure



ARC Series blower with cooling water design

Vibration test report

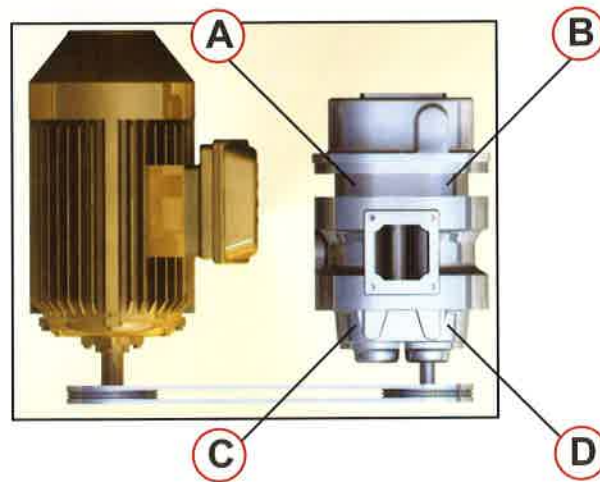

MODEL	mmAq	A	B	C	D
ARC-40	3000	1.3	1.4	1.2	1.6
	4000	1.9	2.1	2.2	2.5
	5000	2.3	2.6	2.7	2.9
ARC-50	3000	2.2	2.3	2.5	2.4
	4000	2.8	2.7	2.9	3.0
	5000	3.4	3.6	3.5	3.5
ARC-65	3000	2.6	2.7	2.9	2.9
	4000	3.4	3.5	3.7	3.5
	5000	4.1	4.3	4.6	4.4
ARC-80	3000	2.9	2.7	3.0	2.9
	4000	3.5	3.5	3.6	3.5
	5000	4.3	4.7	4.6	4.4
ARC-100	3000	3.1	3.0	3.1	2.9
	4000	3.7	3.5	3.6	3.5
	5000	4.6	4.7	4.6	4.4
ARC-125	3000	3.3	3.4	3.1	3.2
	4000	3.7	3.5	3.6	3.8
	5000	4.9	4.7	4.6	4.5
ARC-150	3000	3.8	3.9	4.2	4.1
	4000	4.5	4.5	4.6	4.8
	5000	5.3	5.2	5.6	5.1
ARC-200	3000	4.4	4.3	4.2	4.1
	4000	4.9	4.8	4.9	5.2
	5000	5.3	5.7	5.7	5.8
ARC-250	3000	5.0	4.9	4.9	5.2
	4000	5.4	5.5	5.7	5.8
	5000	6.1	6.3	6.5	6.4
ARC-300	3000	5.3	5.4	5.4	5.2
	4000	5.9	5.7	6.0	5.8
	5000	6.8	6.7	6.9	6.8

Unit : mm/s
Allowance : 7.0 mm/s

Performance table

MODEL	SPEED (min ⁻¹)	Capacity Qs (m ³ /min) & shaft power L (kW) at each discharge pressure															
		1000mmAq		2000mmAq		3000mmAq		4000mmAq		5000mmAq		6000mmAq		7000mmAq		8000mmAq	
		Qs	L	Qs	L	Qs	L	Qs	L	Qs	L	Qs	L	Qs	L	Qs	L
ARC-40	1650	0.48	0.15	0.45	0.29	0.43	0.42	0.41	0.54	0.39	0.65	0.38	0.75				
	1800	0.54	0.17	0.51	0.32	0.49	0.46	0.47	0.59	0.45	0.71	0.44	0.81				
	1950	0.60	0.18	0.57	0.35	0.55	0.50	0.53	0.64	0.51	0.76	0.50	0.88				
	2100	0.66	0.20	0.63	0.37	0.61	0.54	0.59	0.69	0.57	0.82	0.56	0.95				
	2250	0.72	0.21	0.69	0.40	0.67	0.57	0.65	0.73	0.63	0.88	0.62	1.02				
	2400	0.78	0.22	0.75	0.43	0.73	0.61	0.71	0.78	0.69	0.94	0.68	1.09				
	2550	0.84	0.24	0.81	0.45	0.79	0.65	0.77	0.83	0.75	1.00	0.74	1.15				
ARC-50	850	0.99	0.41	0.79	0.80	0.64	1.16	0.50	1.51	0.38	1.84	0.29	2.15	0.20	2.45	0.15	2.74
	1000	1.31	0.48	1.11	0.94	0.96	1.37	0.82	1.77	0.70	2.16	0.61	2.53	0.53	2.88	0.47	3.22
	1150	1.63	0.56	1.44	1.08	1.28	1.57	1.15	2.04	1.02	2.49	0.93	2.91	0.86	3.32	0.79	3.71
	1300	1.95	0.63	1.76	1.22	1.61	1.78	1.47	2.31	1.34	2.81	1.25	3.29	1.18	3.75	1.12	4.19
	1450	2.27	0.70	2.08	1.36	1.93	1.98	1.79	2.57	1.67	3.13	1.58	3.67	1.50	4.18	1.44	4.67
	1600	2.60	0.77	2.40	1.50	2.25	2.19	2.11	2.84	1.99	3.46	1.90	4.05	1.82	4.61	1.76	5.16
	1750	2.92	0.85	2.72	1.64	2.57	2.39	2.43	3.11	2.31	3.78	2.22	4.43	2.14	5.05	2.08	5.64
ARC-65	850	2.07	0.62	1.89	1.21	1.71	1.76	1.55	2.29	1.41	2.78	1.29	3.26	1.19	3.71	1.09	4.15
	1000	2.58	0.73	2.41	1.42	2.22	2.07	2.07	2.69	1.93	3.28	1.81	3.83	1.71	4.37	1.60	4.88
	1150	3.10	0.84	2.93	1.64	2.74	2.38	2.58	3.09	2.45	3.77	2.33	4.41	2.22	5.03	2.12	5.62
	1300	3.62	0.95	3.45	1.85	3.26	2.69	3.10	3.50	2.96	4.26	2.84	4.99	2.74	5.68	2.64	6.35
	1450	4.13	1.06	3.96	2.06	3.77	3.01	3.62	3.90	3.48	4.75	3.36	5.56	3.26	6.34	3.15	7.08
	1600	4.65	1.17	4.48	2.28	4.29	3.32	4.13	4.30	4.00	5.24	3.88	6.14	3.77	6.99	3.67	7.81
	1750	5.17	1.28	5.00	2.49	4.81	3.63	4.65	4.71	4.51	5.73	4.39	6.71	4.29	7.65	4.19	8.55
ARC-80	850	3.00	1.12	2.87	2.14	2.54	3.08	2.23	3.94	1.95	4.73	1.70	5.47	1.48	6.15	1.28	6.79
	1000	3.90	1.32	3.77	2.52	3.44	3.62	3.13	4.63	2.85	5.57	2.60	6.44	2.38	7.24	2.18	7.99
	1150	4.80	1.51	4.67	2.90	4.34	4.16	4.03	5.33	3.75	6.40	3.50	7.40	3.28	8.33	3.08	9.19
	1300	5.70	1.71	5.57	3.27	5.24	4.71	4.93	6.02	4.65	7.24	4.40	8.37	4.18	9.41	3.98	10.39
	1450	6.60	1.91	6.47	3.65	6.14	5.25	5.83	6.72	5.55	8.08	5.30	9.33	5.08	10.50	4.88	11.58
	1600	7.50	2.11	7.37	4.03	7.04	5.79	6.73	7.41	6.45	8.91	6.20	10.30	5.98	11.58	5.78	12.78
	1750	8.40	2.30	8.27	4.41	7.94	6.33	7.63	8.11	7.35	9.75	7.10	11.26	6.88	12.67	6.68	13.98
ARC-100	850	5.80	1.57	5.19	3.00	4.65	4.31	4.16	5.51	3.74	6.63	3.36	7.66	3.03	8.62	2.74	9.51
	1000	7.06	1.84	6.45	3.53	5.91	5.07	5.42	6.49	5.00	7.80	4.62	9.01	4.29	10.14	4.00	11.19
	1150	8.32	2.12	7.71	4.05	7.17	5.83	6.68	7.46	6.26	8.97	5.88	10.36	5.55	11.66	5.26	12.86
	1300	9.58	2.40	8.97	4.58	8.43	6.59	7.94	8.43	7.52	10.14	7.14	11.71	6.81	13.18	6.52	14.54
	1450	10.84	2.67	10.23	5.11	9.69	7.35	9.20	9.41	8.78	11.31	8.40	13.06	8.07	14.70	7.78	16.22
	1600	12.10	2.95	11.49	5.64	10.95	8.11	10.46	10.38	10.04	12.47	9.66	14.42	9.33	16.22	9.04	17.90
	1750	13.36	3.23	12.75	6.17	12.21	8.87	11.72	11.35	11.30	13.64	10.92	15.77	10.59	17.74	10.30	19.57

Performance table

MODEL	SPEED (min ⁻¹)	Capacity Qs (m ³ /min) & shaft power L (kW) at each discharge pressure															
		1000mmAq		2000mmAq		3000mmAq		4000mmAq		5000mmAq		6000mmAq		7000mmAq		8000mmAq	
		Qs	L	Qs	L	Qs	L	Qs	L	Qs	L	Qs	L	Qs	L	Qs	L
ARC-125	750	10.29	2.59	9.42	4.96	8.62	7.13	7.88	9.12	7.25	10.97	6.66	12.67	6.11	14.26	5.65	15.74
	900	12.69	3.11	11.81	5.95	11.01	8.55	10.28	10.95	9.64	13.16	9.05	15.21	8.51	17.11	8.04	18.89
	1050	15.08	3.63	14.20	6.94	13.41	9.98	12.67	12.77	12.03	15.35	11.44	17.74	10.90	19.97	10.44	22.04
	1200	17.48	4.15	16.60	7.93	15.80	11.40	15.07	14.59	14.43	17.55	13.84	20.28	13.29	22.82	12.83	25.18
	1350	19.87	4.66	18.99	8.92	18.19	12.83	17.46	16.42	16.82	19.74	16.23	22.81	15.69	25.67	15.23	28.33
	1500	22.26	5.18	21.39	9.91	20.59	14.25	19.85	18.24	19.22	21.93	18.63	25.35	18.08	28.52	17.62	31.48
	1650	24.66	5.70	23.78	10.90	22.98	15.68	22.25	20.07	21.61	24.13	21.02	27.88	20.48	31.38	20.01	34.63
ARC-150	750	13.32	3.34	12.62	6.39	11.98	9.19	11.40	11.76	10.87	14.14	10.39	16.34	10.00	18.39	9.61	20.30
	900	16.40	4.01	15.70	7.67	15.06	11.03	14.49	14.11	13.95	16.97	13.48	19.61	13.09	22.07	12.70	24.36
	1050	19.49	4.68	18.79	8.95	18.15	12.86	17.58	16.47	17.04	19.80	16.57	22.88	16.18	25.75	15.78	28.41
	1200	22.58	5.35	21.88	10.23	21.24	14.70	20.66	18.82	20.13	22.62	19.65	26.15	19.26	29.42	18.87	32.47
	1350	25.66	6.02	24.96	11.50	24.33	16.54	23.75	21.17	23.21	25.45	22.74	29.42	22.35	33.10	21.96	36.53
	1500	28.75	6.68	28.05	12.78	27.41	18.38	26.84	23.52	26.30	28.28	25.83	32.63	25.44	36.78	25.05	40.59
	1650	31.84	7.35	31.14	14.06	30.50	20.21	29.92	25.88	29.39	31.11	28.91	35.96	28.52	40.46	28.13	44.65
ARC-200	600	17.01	4.84	15.95	9.27	15.04	13.32	14.21	17.06	13.53	20.51	12.93	23.71	12.40	26.68	11.98	29.45
	750	22.68	6.05	21.62	11.58	20.71	16.65	19.88	21.32	19.20	25.64	18.60	29.64	18.07	33.36	17.65	36.82
	900	28.35	7.27	27.29	13.90	26.38	19.98	25.55	25.59	24.87	30.77	24.27	35.57	23.74	40.03	23.32	44.18
	1050	34.02	8.48	32.96	16.22	32.05	23.32	31.22	29.85	30.54	35.89	29.94	41.49	29.41	46.70	28.99	51.55
	1200	39.69	9.69	38.63	18.53	37.72	26.65	36.89	34.12	36.21	41.02	35.61	47.42	35.08	53.37	34.66	58.91
	1350	45.36	10.90	44.30	20.85	43.39	29.98	42.56	38.38	41.88	46.15	41.28	53.35	40.75	60.04	40.33	66.27
	1500	51.03	12.11	49.97	23.17	49.06	33.31	48.23	42.56	47.55	51.28	46.95	59.28	46.42	66.71	46.00	73.64
ARC-250	600	27.72	7.40	26.22	14.16	24.89	20.35	23.68	26.06	22.58	31.34	21.60	36.23	20.73	40.77	19.98	45.00
	750	36.38	9.25	34.88	17.70	33.55	25.44	32.34	32.58	31.24	39.17	30.26	45.28	29.39	50.96	29.64	56.25
	900	45.05	11.10	43.54	21.24	42.22	30.53	41.00	39.09	39.91	47.01	38.92	54.34	38.06	61.15	37.31	67.50
	1050	53.71	12.95	52.21	24.77	50.88	35.82	49.67	45.61	48.57	54.84	47.59	63.39	46.72	71.34	45.97	78.75
	1200	62.37	14.80	60.87	28.31	59.54	40.71	58.33	52.12	57.23	62.67	56.25	72.45	55.38	81.54	54.63	90.00
	1350	71.03	16.65	69.53	31.85	68.20	45.80	66.99	58.64	65.89	70.51	64.91	81.51	64.04	91.73	63.29	101.30
	1500	79.70	18.50	78.19	35.39	76.87	50.89	75.65	65.16	74.56	78.34	73.57	90.56	72.71	101.90	71.96	112.50
ARC-300	600	70.91	17.15	67.70	32.80	65.03	47.16	62.35	60.38	60.21	72.60	58.20	83.93	56.46	94.46	54.99	104.30
	750	90.98	21.43	87.77	41.00	85.10	58.95	82.42	75.48	80.28	90.75	78.27	104.90	76.53	118.10	75.06	130.30
	900	111.10	25.72	107.80	49.20	105.20	70.74	102.50	90.57	100.40	108.90	98.34	125.90	96.60	141.70	95.13	156.40
	1050	131.10	30.01	127.90	57.40	125.20	82.53	122.60	105.70	120.40	127.10	118.40	146.90	116.70	165.30	115.20	182.50
	1200	151.20	34.29	148.00	65.60	145.30	94.32	142.60	120.80	140.50	145.20	138.50	167.90	136.70	188.90	135.30	208.50
	1350	171.30	38.58	168.10	73.80	165.40	106.10	162.70	135.90	160.60	163.40	158.60	188.80	156.80	212.50	155.30	234.60
	1500	191.30	42.87	188.10	82.00	185.40	117.90	182.80	151.00	180.60	181.50	178.60	209.80	176.90	236.10	175.40	260.70

Note for the performance table

1. Air volume listed in the table (hereafter referred to as listed air volume) represents a suction air volume at the standard suction state (temperature 20 °C, absolute pressure 10332 mmAq (1013m bar), relative humidity 65%).
2. Air volume at standard conditions (0 °C, 10332 mmAq. Abs.) can be converted into listed air volume by the following formula:

$$Q_s = Q_N \times \frac{10332}{10332 + P_s} \times \frac{273 + t_s}{273} \quad (1)$$

Air volume at discharge state can be converted into listed air volume by the following formula:

$$Q_s = Q_d \times \frac{10332 + P_d}{10332} \times \frac{273 + t_s}{273 + t_d} \quad (2)$$

Where:

Q_s	: Listed air volume	(m ³ /min)
Q_N	: Air volume at standard condition	(m ³ /min)
Q_d	: Air volume at discharge state	(mmAq G)
p_s	: Suction pressure	(mmAq G)
p_d	: Discharge pressure	(°C)
t_s	: Suction temperature	(°C)
t_d	: Discharge temperature	

To use the formula (2) for conversion, it is necessary to assume a discharge temperature. Discharge temperature of air right after being discharged can be obtained in approximate value by the following formula.

$$t_d \approx t_s + p_d / 100 \quad (3)$$

where, t_s represents suction temperature between 0 and 40 °C.

3. Between two adjacent blower models, air volumes at boundary level overlap. Either of the two models can be used, but, from the economical standpoint it is recommended that smaller model is used. Occasionally, however, a larger model is used at low speed in consideration of noise level. Please refer to noise data given in this catalogue, if this is being considered.
4. Shaft horse power listed in the performance table is a required horse power, including the power requirements for transmission (V Belt). Motor with an output corresponding to the listed shaft horse power can be used. However, it will be better to use motors, of which the outputs are 5 - 10% larger than shaft horse powers. The use of an excessively larger motor would result in unnecessary energy waste, as no load current will increase, causing the motor efficiency to drop.
5. The number of revolutions of each type in the performance table is shown by the standard rpm (common to 50 Hz, 60 Hz) that can be obtained by combining a 4-pole motor and a JIS V-pulley. Use this standard rpm unless otherwise required.
6. This three lobe rotary blower can be used as a dry type vacuum pump for a vacuum up to 5,000 mmAq. Please refer to the table in the next page.





Performance table

MODEL	SPEED (min ⁻¹)	Capacity Qs (m ³ /min) & shaft power L (kW) at each vacuum															
		-1000mmAq		-2000mmAq		-2500mmAq		-3000mmAq		-3500mmAq		-4000mmAq		-4500mmAq		-5000mmAq	
		Qs	L	Qs	L	Qs	L	Qs	L	Qs	L	Qs	L	Qs	L	Qs	L
ARC-40	1650	0.48	0.15	0.46	0.29	0.44	0.36	0.43	0.42	0.40	0.48	0.38	0.54				
	1800	0.54	0.17	0.52	0.32	0.50	0.39	0.49	0.46	0.46	0.52	0.44	0.59				
	1950	0.60	0.18	0.58	0.35	0.56	0.42	0.55	0.50	0.52	0.57	0.50	0.64				
	2100	0.66	0.20	0.64	0.37	0.62	0.46	0.61	0.54	0.58	0.61	0.56	0.69				
	2250	0.72	0.21	0.70	0.40	0.68	0.49	0.67	0.57	0.64	0.66	0.62	0.73				
	2400	0.78	0.22	0.76	0.43	0.74	0.52	0.73	0.61	0.70	0.70	0.68	0.78				
	2550	0.84	0.24	0.82	0.45	0.80	0.55	0.79	0.65	0.76	0.74	0.74	0.83				
ARC-50	850	0.99	0.41	0.82	0.80	0.72	0.98	0.61	1.16	0.51	1.34	1.68	1.51	0.27	1.67	0.14	1.84
	1000	1.31	0.48	1.14	0.94	1.04	1.16	0.93	1.37	0.83	1.57	2.00	1.77	0.59	1.97	0.46	2.16
	1150	1.63	0.56	1.47	1.08	1.36	1.33	1.25	1.57	1.15	1.81	2.32	2.04	0.91	2.27	0.79	2.49
	1300	1.95	0.63	1.79	1.22	1.69	1.50	1.58	1.78	1.48	2.05	2.64	2.31	1.24	2.56	1.11	2.81
	1450	2.27	0.70	2.11	1.36	2.01	1.68	1.90	1.98	1.80	2.28	2.96	2.57	1.56	2.86	1.43	3.13
	1600	2.60	0.77	2.43	1.50	2.33	1.85	2.22	2.19	2.12	2.52	3.29	2.84	1.88	3.15	1.75	3.46
	1750	2.92	0.85	2.75	1.64	2.65	2.02	2.54	2.39	2.44	2.75	3.61	3.11	2.20	3.45	2.07	3.78
ARC-65	850	2.09	0.66	1.91	1.28	1.80	1.58	1.68	1.87	1.55	2.15	1.41	2.42	1.26	2.69	1.09	2.95
	1000	2.60	0.78	2.43	1.51	2.32	1.86	2.19	2.20	2.07	2.53	1.92	2.85	1.77	3.16	1.60	3.47
	1150	3.12	0.89	2.95	1.73	2.84	2.14	2.71	2.53	2.58	2.91	2.44	3.28	2.29	3.64	2.12	3.99
	1300	3.64	1.01	3.46	1.96	3.35	2.41	3.23	2.86	3.10	3.29	2.96	3.71	2.81	4.11	2.64	4.51
	1450	4.15	1.13	3.98	2.19	3.87	2.69	3.74	3.19	3.62	3.67	3.47	4.13	3.32	4.59	3.15	5.03
	1600	4.67	1.24	4.50	2.41	4.39	2.97	4.26	3.52	4.13	4.04	3.99	4.56	3.84	5.06	3.67	5.55
	1750	5.19	1.36	5.01	2.64	4.90	3.25	4.78	3.85	4.65	4.42	4.51	4.99	4.36	5.54	4.19	6.08
ARC-80	850	3.24	1.12	2.83	2.14	2.60	2.62	2.36	3.08	2.10	3.52	1.83	3.94	1.54	4.34	1.23	4.73
	1000	4.14	1.32	3.73	2.52	3.50	3.08	3.26	3.62	3.00	4.14	2.73	4.63	2.44	5.11	2.13	5.57
	1150	5.04	1.51	4.63	2.90	4.40	3.54	4.16	4.16	3.90	4.76	3.63	5.33	3.34	5.88	3.03	6.40
	1300	5.94	1.71	5.53	3.27	5.30	4.01	5.06	4.71	4.80	5.38	4.53	6.02	4.24	6.64	3.93	7.24
	1450	6.84	1.91	6.43	3.65	6.20	4.47	5.96	5.25	5.70	6.00	5.43	6.72	5.14	7.41	4.83	8.08
	1600	7.74	2.11	7.33	4.03	7.01	4.93	6.86	5.79	6.60	6.62	6.33	7.41	6.04	8.18	5.73	8.91
	1750	8.64	2.30	8.23	4.41	8.00	5.39	7.76	6.33	7.50	7.24	7.23	8.11	6.94	8.94	6.63	9.75
ARC-100	850	5.79	1.57	5.19	3.00	4.85	3.67	4.48	4.31	4.09	4.92	3.67	5.51	3.22	6.08	2.74	6.63
	1000	7.05	1.84	6.45	3.53	6.11	4.31	5.74	5.07	5.35	5.79	4.93	6.49	4.48	7.15	4.00	7.80
	1150	8.31	2.12	7.71	4.05	7.37	4.96	7.00	5.83	6.61	6.66	6.19	7.46	5.74	8.23	5.26	8.97
	1300	9.57	2.40	8.97	4.58	8.63	5.61	8.26	6.59	7.87	7.53	7.45	8.43	7.00	9.30	6.52	10.14
	1450	10.83	2.67	10.23	5.11	9.89	6.25	9.52	7.35	9.13	8.40	8.71	9.41	8.26	10.37	7.78	11.31
	1600	12.09	2.95	11.49	5.64	11.15	6.90	10.78	8.11	10.39	9.27	9.97	10.38	9.52	11.45	9.04	12.47
	1750	13.35	3.23	12.75	6.17	12.41	7.55	12.04	8.87	11.65	10.14	11.23	11.35	10.78	12.52	10.30	13.64

Performance table

MODEL	SPEED (min ⁻¹)	Capacity Qs (m ³ /min) & shaft power L (kW) at each vacuum															
		-1000mmAq		-2000mmAq		-2500mmAq		-3000mmAq		-3500mmAq		-4000mmAq		-4500mmAq		-5000mmAq	
		Qs	L	Qs	L	Qs	L	Qs	L	Qs	L	Qs	L	Qs	L	Qs	L
ARC-125	750	10.29	2.59	9.30	4.96	8.78	6.06	8.20	7.13	7.61	8.14	7.01	9.12	6.34	10.06	5.65	10.97
	900	12.69	3.11	11.70	5.95	11.17	7.28	10.60	8.55	10.01	9.77	9.40	10.95	8.73	12.07	8.04	13.16
	1050	15.08	3.63	14.09	6.94	13.57	8.49	12.99	9.98	12.40	11.40	11.79	12.77	11.12	14.09	10.44	15.35
	1200	17.48	4.15	16.49	7.93	15.96	9.70	15.39	11.40	14.79	13.03	14.19	14.59	13.52	16.10	12.83	17.55
	1350	19.87	4.66	18.88	8.92	18.35	10.92	17.78	12.83	17.19	14.66	16.58	16.42	15.91	18.11	15.23	19.74
	1500	22.26	5.18	21.27	9.91	20.75	12.13	20.17	14.25	19.58	16.29	18.98	18.24	18.31	20.12	17.62	21.93
	1650	24.66	5.70	23.67	10.90	23.14	13.34	22.57	15.68	21.98	17.92	21.37	20.07	20.70	22.14	20.01	24.13
ARC-150	750	13.32	3.34	12.55	6.39	12.14	7.82	11.69	9.19	11.20	10.50	10.68	11.76	10.13	12.97	9.55	14.14
	900	16.40	4.01	15.64	7.67	15.23	9.38	14.78	11.03	14.28	12.60	13.77	14.11	13.21	15.57	12.64	16.97
	1050	19.49	4.68	18.73	8.95	18.23	10.95	17.86	12.86	17.37	14.70	16.86	16.47	16.30	18.16	15.72	19.80
	1200	22.58	5.35	21.81	10.23	21.40	12.51	20.95	14.70	20.46	16.80	19.94	18.82	19.39	20.76	18.81	22.62
	1350	25.66	6.02	24.90	11.50	24.49	14.07	24.04	16.54	23.54	18.90	23.03	21.17	22.47	23.35	21.90	25.45
	1500	28.75	6.68	27.99	12.78	27.58	15.64	27.12	18.38	26.63	21.00	26.12	23.52	25.56	25.95	24.98	28.28
	1650	31.84	7.35	31.08	14.06	30.66	17.20	30.21	20.21	29.72	23.10	29.20	25.88	28.65	28.54	28.07	31.11
ARC-200	600	17.01	4.84	15.99	9.27	15.42	11.34	14.86	13.32	14.21	15.23	13.49	17.06	12.78	18.82	11.98	20.51
	750	22.68	6.05	21.66	11.58	21.09	14.17	20.53	16.65	19.88	19.04	19.16	21.32	18.45	23.52	17.65	25.64
	900	28.35	7.27	27.33	13.90	26.76	17.01	26.20	19.98	25.55	22.84	24.83	25.59	24.12	28.23	23.32	30.77
	1050	34.02	8.48	33.00	16.22	32.43	19.84	31.87	23.32	31.22	26.65	30.50	29.85	29.79	32.93	28.99	35.89
	1200	39.69	9.69	38.67	18.53	38.10	22.67	37.54	26.65	36.89	30.46	36.17	34.12	35.46	37.64	34.66	41.02
	1350	45.36	10.90	44.34	20.85	43.77	25.51	43.21	29.98	42.56	34.26	41.84	38.38	41.13	42.34	40.33	46.15
	1500	51.03	12.11	50.01	23.17	49.44	28.34	48.88	33.31	48.23	38.07	47.51	42.65	46.80	47.05	46.00	51.28
ARC-250	600	21.72	7.40	26.22	14.16	25.35	17.32	24.43	20.35	23.45	23.27	22.35	26.06	21.19	28.75	19.98	31.34
	750	36.38	9.25	34.88	17.70	34.01	21.65	33.09	25.44	32.11	29.08	31.01	32.58	39.86	35.94	28.64	39.17
	900	45.05	11.10	43.54	21.24	42.68	25.98	41.75	30.53	40.77	34.90	39.67	39.09	38.52	43.13	37.31	47.01
	1050	53.71	12.95	52.21	24.77	51.34	30.31	50.42	35.62	49.43	40.72	48.34	45.61	47.18	50.31	45.97	54.84
	1200	62.37	14.80	60.87	28.31	60.00	34.64	59.08	40.71	58.10	46.53	57.00	52.12	55.84	57.50	54.63	62.67
	1350	71.03	16.65	69.53	31.85	68.66	38.97	67.74	45.80	66.76	52.35	65.66	58.64	64.51	64.69	63.29	70.51
	1500	79.70	18.50	78.19	35.39	77.33	43.30	76.40	50.89	75.42	58.16	74.32	65.16	73.17	71.88	71.96	78.34
ARC-300	600	70.91	17.15	67.70	32.80	65.96	40.13	63.96	47.16	61.95	53.90	59.81	60.38	57.40	66.61	54.99	72.60
	750	90.98	21.43	87.77	41.00	86.03	50.16	84.03	58.95	82.02	67.38	79.88	75.48	77.47	83.26	75.06	90.75
	900	111.10	25.72	107.80	49.20	106.10	60.20	104.10	70.47	102.10	80.86	99.95	90.57	97.54	99.92	95.13	108.90
	1050	131.10	30.01	127.90	57.40	126.20	70.23	124.20	82.53	122.20	94.33	120.00	105.70	117.60	116.60	115.20	127.10
	1200	151.20	34.29	148.00	65.60	146.20	80.26	144.20	94.32	142.20	107.80	140.10	120.80	137.70	133.20	135.30	145.20
	1350	171.30	39.58	168.10	73.80	166.30	90.29	164.30	106.10	162.30	121.30	160.20	135.90	157.80	149.90	155.30	163.40
	1500	191.30	42.87	181.10	82.00	186.40	100.30	184.40	117.90	182.40	134.80	180.20	151.00	177.80	166.50	175.40	181.50

Outline Dimensions

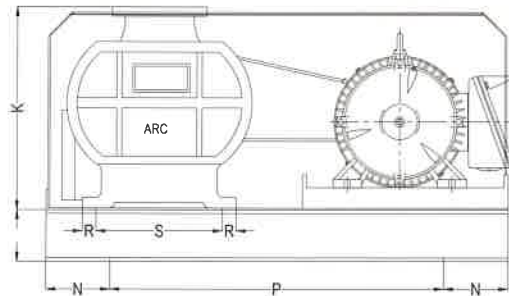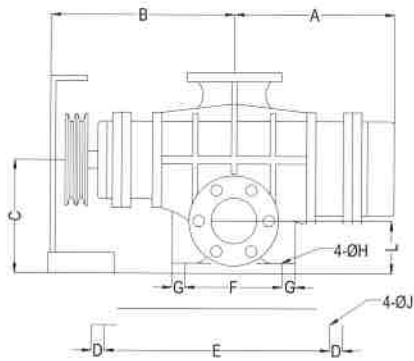

UNITS : mm

MODEL	SUCTION DIA.	DISCHARGE DIA.	A	B max	B min	C	D	E	F	G	H	J	K	L	M	N	P	R	S	Wt (kg) (incl. motor)	Wt (kg) (incl. base)
ARC-40	PT 1" Thread	PT 1.5" Thread	150	174	149	120	20	360	80	15	15	12	182	40	75	80	390	17.5	135	70	95
ARC-50	2"	2"	240	276	251	173	20	420	125	17.5	15	15	343	90	75	100	570	20	200	100	180
ARC-65	2.5"	2.5"	280	318	293	165	20	420	210	15	15	15	343	90	75	100	570	50	200	120	280
ARC-80	3"	3"	310	360	335	220	25	440	190	25	17	15	390	102	100	125	650	25	250	200	340
ARC-100	4"	4"	365	429	404	220	25	440	290	25	17	15	394	115	100	125	650	25	250	230	410
ARC-125	5"	5"	440	479	454	305	25	600	320	25	21	19	515	155	100	150	900	25	350	450	800
ARC-150	6"	6"	495	528	503	305	25	600	425	27.5	21	19	515	155	100	150	900	25	350	500	930
ARC-200	8"	8"	500	516	491	360	37.5	825	270	40	23	19	650	187	150	125	1200	40	550	810	1380
ARC-250	10"	10"	620	611	586	430	37.5	975	460	40	23	19	715	225	150	150	1400	40	550	1100	2200
ARC-300	12"	12"	791	826	801	500	37.5	1425	650	65	27	24	875	250	180	200	1600	55	620	2030	4250

Installation Guides

Vacuum pump operation

Fig. 1


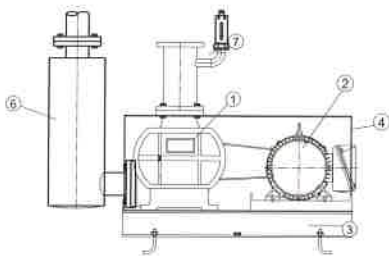


Fig. 2

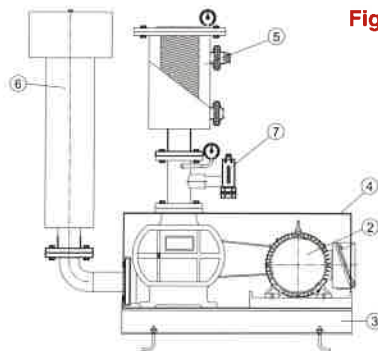

No.	Part name
1	Vacuum Pump
2	Motor
3	Common Base
4	Belt Guard
5	Suction Filter Tank
6	Discharge Silencer
7	Vacuum Breaker

Blower operation

Fig. 3


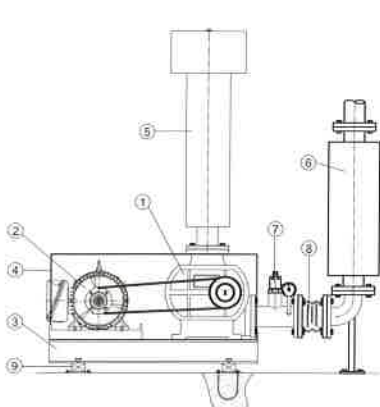


Fig. 4

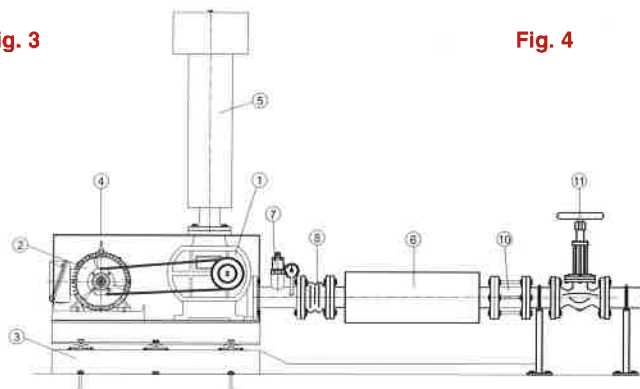



No.	Part name
1	Rotary Blower
2	Motor
3	Common Base
4	Belt Guard
5	Suction Silencer
6	Discharge Silencer
7	Relief Valve
8	Check Valve
9	Vibration Isolator
10	Flexible Joint
11	Gate Valve

Note : When using a flexible joint, be sure to provide a support under the discharge silencer

Accessories



Suction Silencer

TYPE	F	A	B	ØD1	ØD2	C
US 40	40A JIS 10 K	733	75	220	137	125
US 50	50A JIS 10 K	865	100	300	160	178
US 65	65A JIS 10 K	900	100	300	190	190
US 80	80A JIS 10 K	950	100	322	168	210
US 100	100A JIS 10 K	980	100	350	190	214
US 125	125A JIS 10 K	1345	150	460	330	300
US 150	150A JIS 10 K	1375	150	510	380	320
US 200	200A JIS 10 K	1655	180	647	470	440
US 250	250A JIS 10 K	1750	180	750	550	500
US 300	300A JIS 10 K	1900	200	800	600	600

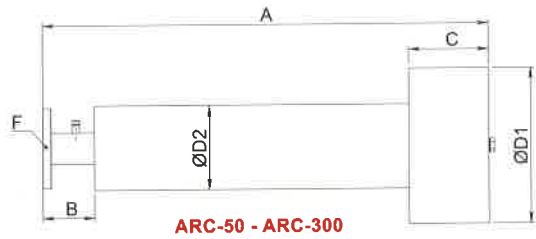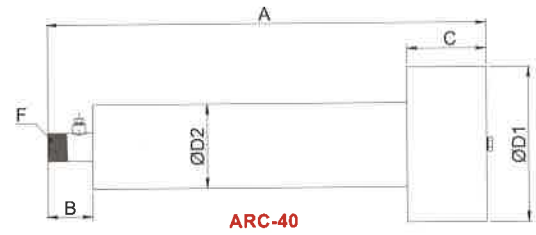


Discharge Silencer

TYPE	F	H	L	ØD
UD - 40	40A JIS 10 K	500	53	140
UD - 50	50A JIS 10 K	550	60	165
UD - 65	65A JIS 10 K	630	60	190
UD - 80	80A JIS 10 K	710	65	220
UD - 100	100A JIS 10 K	810	65	250
UD - 125	125A JIS 10 K	900	80	280
UD - 150	150A JIS 10 K	1100	90	330
UD - 200	200A JIS 10 K	1620	100	400
UD - 250	250A JIS 10 K	1750	120	550
UD - 300	300A JIS 10 K	1900	140	600

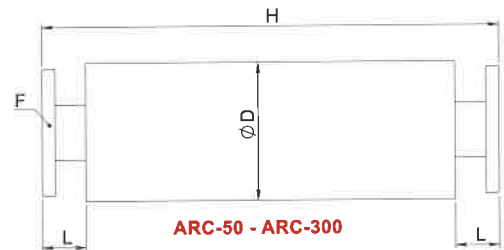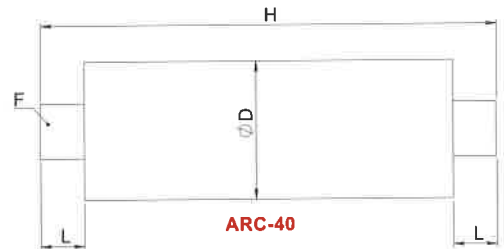

Safety Valve 3/4"


TYPE	H	H1	D1	L	Weight (kg)	Model
R-040	100	25	20	14.35	0.4	ARC-40



Safety valve 3/4"

Safety Valve 1 1/2"



TYPE	H	H1	D1	D	L	Weight (kg)	Model
R-050	122	81	30	42	25	1	ARC-50-300



Safety Valve 1 1/2"


Short Pipe

TYPE	F	S	L	Weight (kg)
USP 40	PT 1/2"	3/4"	163 mm	1.2
USP 50	50A JIS 10 K	1 1/2"	180 mm	5
USP 65	65A JIS 10 K	1 1/2"	180 mm	7.1
USP 80	80A JIS 10 K	1 1/2"	205 mm	7.1
USP 100	100A JIS 10 K	1 1/2"	205 mm	9.5
USP 125	125A JIS 10 K	1 1/2"	270 mm	11.5
USP 150	150A JIS 10 K	1 1/2"	270 mm	18
USP 200	200A JIS 10 K	1 1/2"	300 mm	26.5
USP 250	250A JIS 10 K	1 1/2"	300 mm	35
USP 300	300A JIS 10 K	1 1/2"	350 mm	46

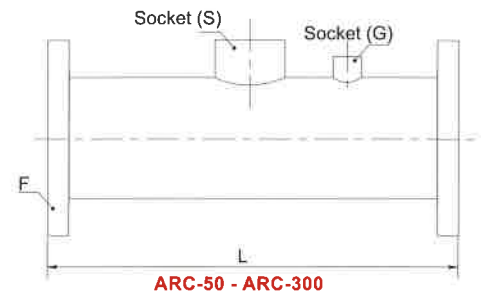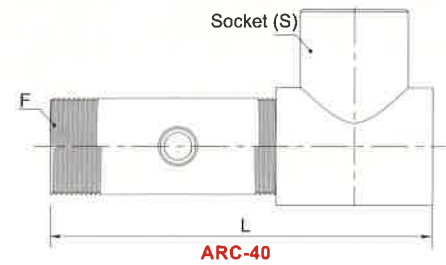


Check Valve

TYPE	A	B	C	D
ARC - 50	101	17	50	40
ARC - 65	124	19	65	55
ARC - 80	134	20	80	70
ARC - 100	158	20	100	90
ARC - 125	189	23	125	115
ARC - 150	218	24	150	140
ARC - 200	270	28	200	190
ARC - 250	330	30	250	240
ARC - 300	375	32	300	290

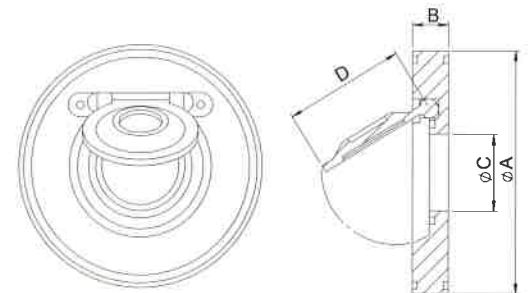

Filter Tank

MODEL	A	B	C	E	H
B - 50	410	50	180	210	600
B - 65	410	65	180	210	600
B - 80	500	80	210	270	700
B - 100	500	100	210	270	700
B - 125	560	125	240	330	850
B - 150	560	150	240	330	850
B - 200	680	200	265	380	1000
B - 250	680	250	265	380	1000
B - 300	680	300	300	450	1000

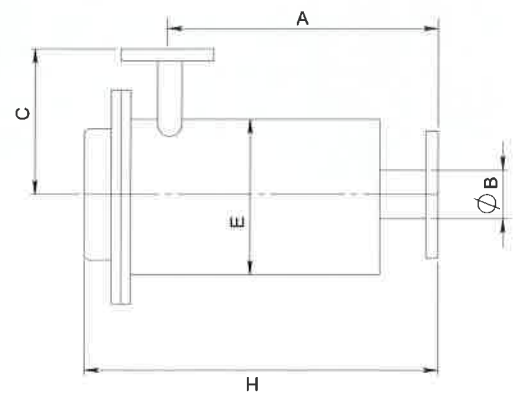

Typical Applications

Wastewater Aeration

Mixing

Aquaculture Aeration

General Water Treatment

Membrane

Our membrane is specially designed and manufactured for tropical weather. In normal operation, air temperature is raised 10-15 degree celsius for every meter of submerged depth. For a typical tank of 3.5 meter depth, and ambient temperature of 30 degree celsius; the membrane will be blown by as hot as 70 degree celsius air temperature. This is the reason why membrane not made for tropical weather deteriorates fast.

Unlike other manufactures that use sulfur vulcanizing system, we employ peroxide cured and compression mould process for our UNO membrane. Our process is harder to make but they yield an excellent quality suitable for use under higher temperature conditions.




Advantages

Energy-saving

More than 50% of treatment power was attributed to aeration. By replacing your aeration system from mechanical aerators, you could half your electricity bill. In most cases, the capital investment for replacement is justified by the saving on electricity cost in just one year.

Gentle Mixing

UNO provides a very fine bubble, which promotes sludge floc forming. Good sludge floc make precipitation easy and thus improve effluent quality.

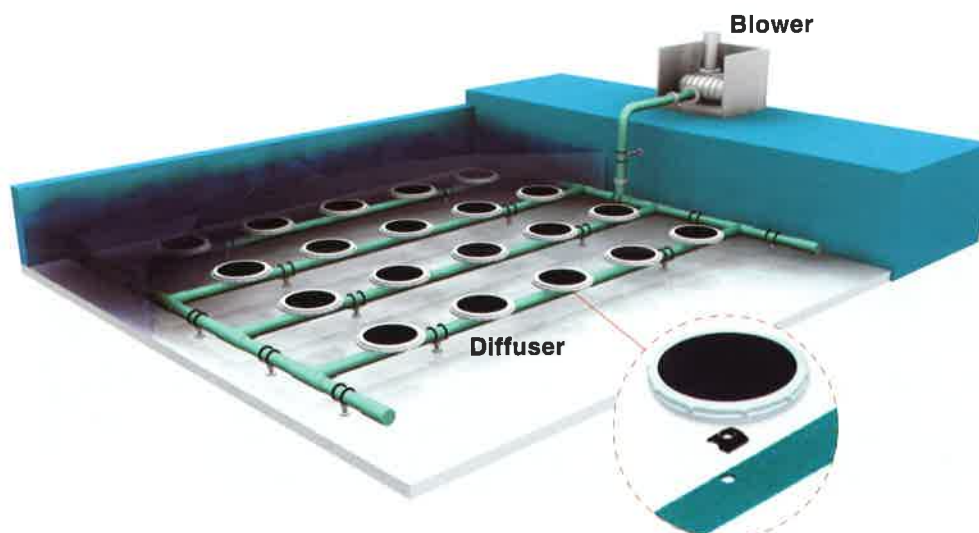



Increase Treatment Capacity

Efficient aeration like UNO system results in shorter retention time in aeration tank. Many plants see the increase in treatment capacity after using our UNO system.

Less Maintenance

Not having any moving parts under water is a blessing every maintenance personnel requested for.

The only maintenance required is for some period cleaning during months of operation.


Accessories

- Gas Injection Valves
- Water Drainage
- Plastic Pipe Support
- Mobile Cleaning System

Physical Conditions

Parameters	Unit	Value
Normal Flow of Air	m ³ / hr / diffuser	4.0 (20 deg.C:1.013 bar)
Max. Flow of Air	m ³ / hr / diffuser	up to 5.5(20 deg.C:1.013 bar)
Peak Air Flow	m ³ / hr / diffuser	7.5(10 min. for cleaning of diffuser)
Aeration Surface Area	per diffuser	380 cm ³
Weight	per diffuser	610 grams
Outside Diameter	mm.	268
Bubble size	mm.	1 - 3 mm.
Max air temperature	Celsius	90
SOTE	%/m - approx.	6 - 8
Pressure Loss	mm aq	200 at flow 4.0 m ³ / hr
Size of Bubbles	mm.	1 - 3

Oxygen Transfer Curve for UNO

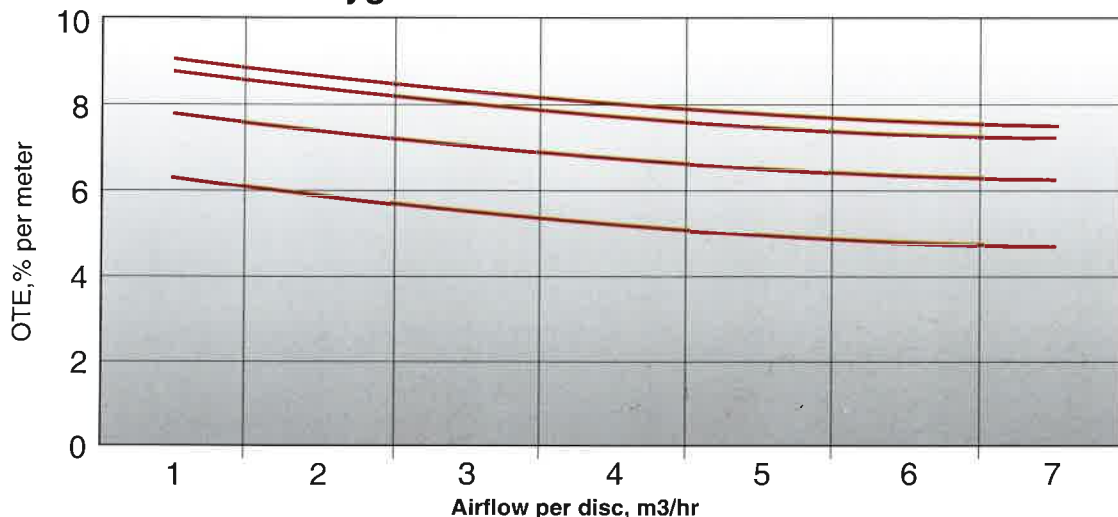

Diffuser Densities shown are from top 15%, 10%, 5%, and 3%
Diffuser depth is at 4.0 meter

REFERENCE BLOWER " UNOMACH "

FACTORY

MS MANUFACTURING CO.,LTD.
GEMOPOLIS CO.,LTD.
MAXXIS, RAYONG
JORTUN (THAILAND) CO.,LTD.
ZULIAN (THAILAND) CO.,LTD.
ANITA PHASE II
IRPC PUBLIC COMPANY LIMITED
SEFA MANUFACTURING
WATER PIPE LINE CO.,LTD.
M.K RESTERUANG MANUFACTURING
MOTEX CO.,LTD.
NEW LAB BUILDING BAUR RAYONG
ISUZU (THAILAND) CO.,LTD.
DAISIN CO.,LTD.
CANNON (THAILAND) CO.,LTD.
KYB (THAILAND) CO.,LTD.
THAI MISUWA (THAILAND)CO.,LTD.
SERMSUK CO.,LTD.
CANON HI TECH CO.,LTD.
ICHIKOH NEW FACTORY / AMATA CITY
BENCH MARK CO.,LTD.
NEC CO.,LTD.
HITACHI MANUFACTURING
THAI GERMAN CERAMIC CO.,LTD.
MMth (THAILAND) CO.,LTD.
NEC WELGROW
JATCO CO.,LTD.
THAI SUMMIT (T8E)
NHK (THAILAND) CO.,LTD.
SAMSUNG CO.,LTD.
SAHA UNION CO.,LTD.
M-TECH AUTO
FARMASAN LABORATORY CO.,LTD.
DENSO (THAILAND)CO.,LTD.
AJINOMOTO (THAILAND) CO.,LTD.
DAISHIN CO.,LTD.
SAMBO-NAVANAKORN
GPFT CO.,LTD.
SIAM WATER CO.,LTD.
KOYO JOIN (THAILAND)CO.,LTD.
ALUCON CO.,LTD.
HONDA (THAILAND) CO.,LTD.
THAI FINE EASTERN SEABORD
KULTRON CO.,LTD.
EXYDY MANUFACTURING FACTORY 4
SUZUKI (THAILAND) CO.,LTD.

หน่วยงานเอกชนและรัฐวิสาหกิจ

มหาวิทยาลัยเทคโนโลยีพระจอมเกล้า ธนบุรี
มหาวิทยาลัยเกษตรศาสตร์
มหาวิทยาลัยกรุงเทพ
มหาวิทยาลัย มหิดล
จุฬาลงกรณ์มหาวิทยาลัย
มหาวิทยาลัยรังสิต
มหาวิทยาลัยรามคำแหง
มหาวิทยาลัย บูรพา
มหาวิทยาลัยพายัพ
มหาวิทยาลัยราชภัฏ
สถาบันเทคโนโลยีราชมงคล
โรงเรียน เซนต์คาเบรียล สามเสน
โรงเรียนอัสสัมชัญลำปาง จ.ลำปาง
ร.ร.สาริต รามคำแหง
ร.ร.ช่างฝีมือทหาร
โรงพยาบาลจุฬารัตน์
โรงพยาบาลลาดหลุมแก้ว จ.ปทุมธานี
โรงพยาบาลกล้วยน้ำไท
โรงพยาบาลพิวทันโฮสปีทอล
รพ.เจ้าพระยาอภัยภูเบศร จ.ปราจีนบุรี
รพ.กรุงเทพ-พระประแดง
รพ.ศิริโรจน์ กูเก็ท
วัดท่าซุง จ.อุทัยธานี
วัดพานีดาราม จ.ฉะเชิงเทรา
ศาลากลางมุกดาหาร
ศาลแรงงาน ภาค 5 จ.เชียงใหม่
ภัณฑสถานหลวงเชียงใหม่
เรือนจำกลางชุมพร
สนามกีฬา INDOOR หัวหมาก
กฟผ (เขื่อนรัชชประภา)
กรมราชองครักษ์
กรมธนารักษ์
กองบัญชาการกองทัพไทย
ระบบผลิตน้ำประปาบุรีรัมย์
ปตท.โรกลัน จ.ระยอง

SHOPING MALL

TESCO LOTUS
BIG C SUPERCENTER
HOME PRO
THE MALL
CENTRAL WORLD
MEGA BANGNA
THE CERCLE
INDEX LIVING MALL
THE WALK
ROYAL PARAGON

CONDOMINIUM & HOTEL

MOON LOFT CONDOMINIUM
REGENT SUKHUMVIT
SENSE OF LONDON CONDOMINIUM
BAAM YAMU PHASEM PHUKET
THE HABB CONDOMINIUM
CONDO LATTE
THE KRIS EXTRA 5
THE GREEN PHASE I,II
THE TREE CONDO
TUDIO RANGSIT
THE CHARM
M RESIDENCE CONDOMINIUM
THE RENDE
VIA BOTANI
PREMA CONDO
HAPPY CONDOMINIUM
THE CHARM PHUKET
MODENA CONDOMINIUM
THE COLDRY VIVID
KAMALAYA KOH SAMUI
BANGKOK HORIZON
KATA BOCKS BLOCK
RAYONG MARIOTT RESORT & SPA
GRAND FORWARD HOTEL
HOLIDAY INN EXPRESS
CONRAD SAMUI
THE LOFT RESORT AT LAGUNA PHUKET

GAS STATION

ESSO
PTT
BANGCHAK
SHELL
CALTEX

EXPORT

MYANMAR
LAO
CAMBUDIA
MALAYSIA
PHILIPPINES
VIET NAM

UNOMACH CO., LTD.

2235 E. FLAMIGO ROAD,
#201A, LAS VEGAS, NEVADA 89119, U.S.A.
www.unomach.com